

DH-IPC-HDBW1439E1-A-IL

4MP Entry Smart Dual Light Fixed-focal Dome Network Camera



Series Overview

With features of simple installation, easy operation, and high performance-cost ratio, Dahua Entry series network camera is applicable to small and medium-sized scenes, such as homes/residences, small-sized retail stores, and other small and medium-sized enterprises.

Functions

Smart Dual Light

Dahua Smart Dual Light technology adopts smart algorithm to detect targets. Usually, the IR illuminator is on at night; when the target appears in the monitoring area, the white light is on, and the camera records the full-color video and information of key events. That is, the camera links snapshot and video with full-color image. When the target is out of the monitoring area, the white light is off and the IR illuminator is on, which reduces light pollution efficiently.

Human Detection

Dahua intelligent algorithms extract moving human targets from videos and filters out alarms that are triggered by non-human targets to increase the accuracy and effectiveness of alarms.

Smart H.265+ & Smart H.264+

With advanced scene-adaptive rate control algorithm, Dahua smart encoding technology realizes the higher encoding efficiency than H.265 and H.264, provides high-quality video, and reduces the cost of storage and transmission.

WDR

With advanced Wide Dynamic Range (WDR) technology, Dahua network camera provides clear details in the environment of strong brightness contrast. The bright and dark area can get clear video even in high brightness environment or with backlight shadow.

- 4-MP 1/3" CMOS image sensor, low luminance, and high definition image.
- · Outputs max. 4 MP (2560 × 1440)@25/30 fps.
- · H.265 codec, high compression rate, ultra-low bit rate.
- Built-in IR LED and warm light, and the max. IR distance is 30 m, the max. warm light distance is 30 m.
- WDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes.
- ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments.
- Abnormality detection: Motion detection, video tampering, audio detection, network disconnection, IP conflict and illegal access.
- · Built in Mic.
- 12 VDC/PoE power supply, easy for installation.
- · IP67 and IK08 protection.
- · Supports human detection.















Protection (IP67, Wide Voltage)

IP67: The camera passes a series of strict test on dust and soak. It has dust-proof function, and the enclosure can work normally after soaking in 1 m deep water for 30 minutes.

Wide voltage: The camera allows $\pm 30\%$ (for some power supplies) input voltage tolerance (wide voltage range), and it is widely applied to outdoor environment with instable voltage.

Technical Specification							Smart Codec	Smart H.265+; Smart H.264+
Camera							Video Frame Rate	Main stream: 2560 × 1440@(1–25/30 fps)
Image Sensor		1/3" CMOS						Sub stream: 704 × 576@(1–25 fps)/704 × 480@(1–30 fps) *The values above are the max. frame rates of each stream; for multiple streams, the values will be subjected to the total encoding capacity.
Max. Resolution		2560 (H) × 1440 (V)						
ROM		128 MB					Streaming Capability	2 streams
RAM		128 MB					Streaming capability	4M (2560 × 1440); 3M (2304 × 1296); 1080p (1920 ×
Scanning System		Progressive					Resolution	1080); 1.3M (1280 × 960); 720p (1280 × 720); D1 (704 576/704 × 480); VGA (640 × 480); CIF (352 × 288/352 240)
Electronic Shutter Speed		Auto/Manual 1/3 s-1/100,000 s						
Min. Illumination		0.008 lux@F1.6 (Color, 30 IRE); 0.0008lux@F1.6 (B/W, 30 IRE); 0 lux (Illuminator on)					Bit Rate Control	VBR;CBR
S/N Ratio		>56 dB					Video Bit Rate	H.264: 32 kbps–4096 kbps; H.265: 12 kbps–4096 kbps
Illumination Distance		Up to 30 m (98.43 ft) (IR) Up to 30 m (98.43 ft) (Warm light)					Day/Night	Auto(ICR)/Color/B/W
Illuminator On/Off Control		Auto;Manual					BLC	Yes
Illuminator Number		3 (IR LED); 4 (Warm light)					HLC	Yes
		Pan: 0°–355°					WDR	120 dB
Angle Adjustment		Tilt: 0°-65° Rotation: 0°-355°					White Balance	Auto; natural; street lamp; outdoor; manual; regional custom
Lens							Gain Control	Auto/Manual
Lens Type		Fixed-focal					Noise Reduction	3D NR
Lens Mount		M12					Motion Detection	OFF/ON (4 areas, rectangular)
Focal Length		2.8 mm; 3.6 mm					Region of Interest (RoI)	Yes (4 areas)
Max. Aperture		F1.6					Smart Illumination	Yes
Field of View		2.8 mm: H: 95.5°; V: 53.4°; D: 110.7° 3.6 mm: H: 78.4°; V: 42.4°; D: 92.4°					Smart Dual Light	Yes
Iris Control		Fixed					Image Rotation	0°/180°
Close Focus Distance		2.8 mm: 1.0 m (3.28 ft)					Mirror	Yes
Close Focus Distance		3.6 mm: 1.5 m (4.92 ft)					Privacy Masking	4 areas
	Lens	Detect	Observe	Recognize	Identify		Audio	
	2.8 mm	61.6 m (202.10 ft)	24.6 m (80.71 ft)	12.3 m (40.35 ft)	6.2 m (20.34 ft)		Built-in MIC	Yes, built-in Mic
	2.6	80.0 m	32.0 m	16.0 m	8.0 m		Audio Compression	G.711a; G.711Mu; PCM; G.726
DORI	3.6 mm	(262.47 ft)	(104.99 ft)	(52.49 ft)	(26.25 ft)		Alarm	
Distance	*DORI (Detect, Observe, Recognize, Identify) is a standard system (EN-62676-4) for defining the ability of a person viewing the video to distinguish persons or objects within a covered area.						Alarm Event	Network disconnection; IP conflict; illegal access; motion detection; video tampering; audio detection; SMD (human); security exception;
		ne numbers in this table do not reflect intelligent function stances. For intelligent function distances, refer to installation					Network	
		ioning manual/project design tool.					Network Port	RJ-45 (10/100 Base-T)
Intelligence							SDK and API	Yes
Human Detection		Support the classification and accurate detection of human					Network Protocol	IPv4; IPv6; HTTP; TCP; UDP; ARP; RTP; RTSP; RTCP; RTMP; SMTP; FTP; DHCP; DNS; DDNS; NTP; Multicast; ICMP; IGMP; P2P; Auto Registration
Smart Search		Work together with Smart NVR to perform refine intelligent search, event extraction and merging to event videos					Interoperability	ONVIF (Profile S & Profile T); CGI
Video							User/Host	6 (Total bandwidth: 24 M)
		H.265; H.264; H.264H; H.264B; MJPEG (Only supported					Storage	FTP
Video Compression		by the sub stream)					Browser	IE; Chrome; Firefox

Entry Series | DH-IPC-HDBW1439E1-A-IL

Management Software	Smart PSS Lite; DSS; DMSS		
Mobile Client	iOS;Android		
Security	Digest;WSSE;Account lockout;Security logs;Generatio and importing of X.509 certification;HTTPS;Trusted boot;Trusted execution;Trusted upgrade		
Certification			
Certifications	CE-LVD: EN62368-1; CE-EMC: Electromagnetic Compatibility Directive 2014/30/EU		
Power			
Power Supply	12 VDC (±30%); PoE (802.3af)		
Power Consumption	Basic: 2.3 W (12 VDC); 3.1 W (PoE); Max.: 6.8 W (12 VDC); 7.9 W (PoE) (H.265 + intelligence on + WDR+ illuminator intensity)		
Environment			
Operating Temperature	-40 °C to +60 °C (-40 °F to +140 °F)		
Operating Humidity	≤95% (RH), non-condensing		
Storage Temperature	-40 °C to +60 °C (-40 °F to +140 °F)		
Storage Humidity	≤95% (RH), non-condensing		
Protection	IP67; IK08		
Structure			
Casing Material	Metal + Plastic		
Product Dimensions	81.0 mm × Φ109.9 mm (3.19" × Φ4.33")		
Net Weight	0.33 kg (0.73 lb)		
Gross Weight	0.48 kg (1.06 lb)		

Ordering Information							
Туре	Model	Description					
IP CAMERA	DH-IPC-HDBW1439E1-A-IL	4MP Entry Smart Dual Light Fixed-focal Dome Network Camera					
	DH-PFB220C	Ceiling Mount Bracket					
	DH-PFA109	Mount Adapter					
	DH-PFA151	Corner Mount Bracket					
	DH-PFB305W	Wall Mount Bracket					
	DH-PFA150	Pole Mount Bracket					
Accessories (Optional)	DH-PFB203W	Wall Mount Bracket					
	DH-PFA156	Pole Mount Bracket					
	DH-PFA136	Junction Box					
	DH-PFM321-EN	DC12V1A power adapter					
	DH-PFM320D-EN	DC12V2A power adapter					
	PFM900-E	Integrated Mount Tester					

Accessories

Optional:







DH-PFA109 Mount Adapter

DH-PFA136 Junction Box

DH-PFA150 Pole Mount Bracket







DH-PFA151 Corner Mount Bracket

DH-PFA156 Pole Mount Bracket

DH-PFB203W Wall Mount Bracket







DH-PFB220C Ceiling Mount Bracket

DH-PFB305W Wall Mount Bracket


DH-PFM320D-EN DC12V2A power adapter





DH-PFM321-EN DC12V1A power adapter

PFM900-E Integrated Mount Tester

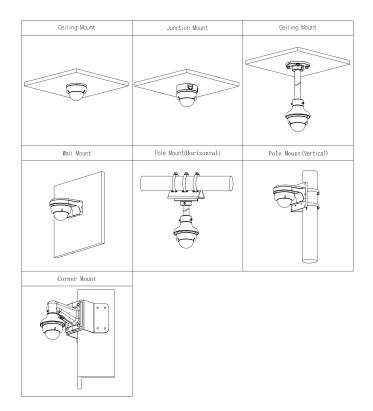

Dimensions (mm[inch])

