



KX-S3L-4G

3MP Outdoor Fixed-focal 4G Pan & Tilt Network Camera



3MP

Clear images with sharp details



4G Connection

Expands your connectivity with 4G



One Camera for 360° View

360° monitoring without blind spots



AI Human Detection

Focuses on what matters and reduces false alarms



AI Vehicle Detection

Focuses on what matters and reduces false alarms



Smart Dual Light

Captures color details for post-event review



Sound and Light Alarm

Provides instant alarms to deter intruders



Two-way Talk

Communication anytime, anywhere



Auto Tracking

Automatic tracking of targets



IP66 Protection

Withstands harsh environments




H.265

Advanced H.265 compression technology



Supports Micro SD Card

Low-cost storage

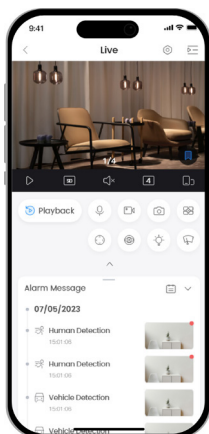

Upgrade Your Experience with KBView Plus

KBView Plus is a professional remote surveillance management platform that offers remote monitoring, device migration, and sharing. When connected to the internet, the platform provides real-time alerts to improve surveillance efficiency and grant flexibility in security management.





KX-S3L-4G

3MP Outdoor Fixed-focal 4G Pan & Tilt Network Camera



Specifications

Camera

Image Sensor	1/2.8" CMOS
Max. Resolution	2304 (H) × 1296 (V)
Illumination Distance	30 m (98.43 ft) (warm light); 30 m (98.43 ft) (IR)
Electronic Shutter Speed	1/25 s–1/100,000 s
Illuminator Number	2 (IR light); 2 (warm light)

Lens

Focal Length	4.0 mm
Max. Aperture	F1.6
Field of View	H: 73.85°; V: 43.43°; D: 86.56°
Iris Control	Fixed

PTZ

Pan/Tilt Range	Pan: 0° to 345° Tilt: 0° to +90°
----------------	-------------------------------------

Smart Event

IVS	Tripwire and intrusion
Human Detection	Human detection; Auto-tracking
Vehicle Detection	Yes

Intelligence

SMD	SMD 3.0
-----	---------

Video

Video Compression	Smart H.265+; H.265; Smart H.264+; H.264B; H.264M; H.264H; MJPEG (Sub Stream 1)
Video Frame Rate	Main stream: 3M/720p/640 × 360@ (1–25/30 fps) Sub stream 1: D1/VGA/CIF@ (1–25/30 fps)
Video Bit Rate	H264: 64–8,192 kbps H265: 25–6,400 kbps
Day/Night	Auto (ICR); Color/B/W

WDR

Motion Detection

Image Rotation

Audio

Audio Compression

Built-in MIC

Built-in Speaker

Network

Wireless Carrier Frequency Band

Max. Transmission Power

Storage

Mobile Client

DWDR

Yes

180°

PCM; G.711a; G.711Mu; G.726

Yes

Yes

EU LTE-FDD: B1/B3/B5/B7/B8/B20/B28
LA LTE-FDD: B2/B3/B4/B5/B7/B8/B28/B66

4G: Power class3:23 dBm ± 2 dB

Micro SD card (support max. 256 GB);

iOS; Android

General

Power Supply

Power Consumption

Power Adapter

Operating Temperature

Operating Humidity

Protection

Camera Button

Casing Material

Product Dimensions

Net Weight

12 VDC, 1 A ± 10%

Basic: 3W
Max: 9 W (illuminator + PTZ)

Included

–30 °C to +55 °C (–22 °F to +131 °F)

≤95%

TVS 2000 V lightning proof; surge protection; voltage transient protection; Waterproof and Dustproof

Reset button

Plastic

140.5 mm × Φ111.0 mm (5.53" × Φ4.37")

0.5 kg (1.10 lb)