



# KX-S5L-4G

5MP Outdoor Fixed-focal 4G Pan & Tilt Network Camera



## 5MP

Clear images with sharp details



## 4G Connection

Expands your connectivity with 4G



## One Camera for 360° View

360° monitoring without blind spots



## AI Human Detection

Focuses on what matters and reduces false alarms



## AI Vehicle Detection

Focuses on what matters and reduces false alarms



## Smart Dual Light

Captures color details for post-event review



## Sound and Light Alarm

Provides instant alarms to deter intruders



## Two-way Talk

Communication anytime, anywhere



## Auto Tracking

Automatic tracking of targets



## IP66 Protection

Withstands harsh environments




## H.265

Advanced H.265 compression technology



## Supports Micro SD Card

Low-cost storage

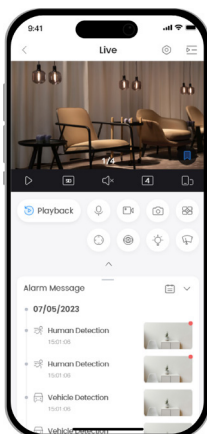

## Upgrade Your Experience with KBView Plus

KBView Plus is a professional remote surveillance management platform that offers remote monitoring, device migration, and sharing. When connected to the internet, the platform provides real-time alerts to improve surveillance efficiency and grant flexibility in security management.



# KX-S5L-4G

## 5MP Outdoor Fixed-focal 4G Pan & Tilt Network Camera



## Specifications

### Camera

Image Sensor	1/2.8" CMOS
Max. Resolution	2880 (H) × 1620 (V)
Illumination Distance	30 m (98.43 ft) (warm light); 30 m (98.43 ft) (IR)
Electronic Shutter Speed	1/25 s–1/100,000 s
Illuminator Number	2 (IR light); 2 (Warm light)

### Lens

Focal Length	4.0 mm
Max. Aperture	F1.6
Field of View	H: 81.27°; V: 47.73°; D: 94.41°
Iris Control	Fixed

### PTZ

Pan/Tilt Range	"Pan: 0° to 345° Tilt: 0° to +90°"
----------------	---------------------------------------

### Smart Event

IVS	Tripwire and intrusion
Human Detection	Human detection; Auto-tracking
Vehicle Detection	Yes

### Intelligence

SMD	SMD 3.0
-----	---------

### Video

Video Compression	Smart H.265+; H.265; Smart H.264+; H.264B; H.264M; H.264H; MJPEG (Sub Stream 1)
Video Frame Rate	Main stream: 5M/1080p/720p/640 × 360@ (1–25/30 fps) Sub stream 1: D1/VGA/CIF@ (1–25/30 fps)
Video Bit Rate	H264: 64– 8192 kbps H265: 25– 6400 kbps
Day/Night	Auto (ICR); Color/B/W

WDR	DWDR
-----	------

Motion Detection	Yes
------------------	-----

Image Rotation	180°
----------------	------

### Audio

Audio Compression	PCM; G.711a; G.711Mu; G.726
Built-in MIC	Yes
Built-in Speaker	Yes

### Network

Wireless Carrier Frequency Band	EU LTE-FDD: B1/B3/B5/B7/B8/B20/B28 LA LTE-FDD: B2/B3/B4/B5/B7/B8/B28/B66
Max. Transmission Power	4G: Power class3: 23dBm±2dB
Storage	Micro SD card (support max. 256 GB);
Mobile Client	iOS; Android

### General

Power Supply	12 VDC, 1 A ± 10%
Power Consumption	Basic: 3 W Max: 9 W (Illuminator + PTZ)
Power Adapter	Included
Operating Temperature	–30 °C to +55 °C (–22 °F to +131 °F)
Operating Humidity	≤95%
Protection	TVS 2000 V lightning proof; surge protection; voltage transient protection; Waterproof and Dustproof
Camera Button	Reset button
Casing Material	Plastic
Product Dimensions	140.5 mm × Φ111.0 mm (5.53" × Φ4.37")
Net Weight	0.5 kg (1.10 lb)