

KX-CAi4K8108N2

8 Channel Compact 1U NVR

Design and specifications are subject to change without notice.
Pictures in the document are for reference only, and the actual product shall prevail.



- New 4.0 user interface
- Remote surveillance, live view and video play on mobile phone App
- Max. decoding capability: 4x1080P@30fps. Supports adaptive decoding
- Supports mainstream cameras of ONVIF and RTSP protocols
- H.264/H.265/Smart H.264+/Smart H.265+/MJPEG, H.265 auto switch
- 1 VGA/1 HDMI simultaneous video output by default, the maximum resolution of HDMI is 4K; and non-simultaneous video output is also supported, the maximum resolution is 1080P
- 1-channel face detection and recognition (AI by NVR); or 2-channel perimeter detection (AI by NVR); or 4-channel SMD (AI by NVR); up to 10 face databases and 5,000 face images
- All-channel AI by camera: face detection and comparison, perimeter protection and SMD
- Security baseline 2.1



System		Multi-channel Playback	Up to 8 channels playback
Main Processor	Industrial-grade embedded processor	Record Mode	Priority of record mode: Manual recording > alarm recording > motion detection recording > timed recording
Operating System	Embedded Linux	Storage	Local HDD and network
Operation Interface	Web/operating in local GUI	Backup	USB device
Video		Playback Function	1. Play, pause, stop, fast forward, fast backward, rewind, play by frame 2. Full screen, backup (cut/file), partially enlarge, audio on/off
Access Channel	8 channels	SMD Plus	
Network Bandwidth	80 Mbps for access, 80 Mbps for storage and 60 Mbps for forwarding.	Performance	4 channels
Resolution	12M/8M/5M/4M/3M/2M/720P/D1	AI Search	Search by target classification (Human, Vehicle)
Decoding Capability	1ch 8MP@30fps 4ch 1080P@30fps	Face Recognition	
Video Output	1 VGA/1 HDMI simultaneous video output by default, the maximum resolution of HDMI is 4K	Performance	Max 8 face pictures/sec processing 1 channel video stream face recognition
Multi-screen Display	1/4/8/9	Stranger Mode	Detect strangers' faces (not in device's face database). Similarity threshold can be set manually.
Third Party Camera Access	Onvif, RTSP	AI Search	Up to 8 target face images search at same time, similarity threshold can be set for each target face image.
Compression		Database Management	Up to 10 face databases with 5,000 face images in total. Name, gender, birthday, address, certificate type, certificate No., countries®ions and state can be added to each face picture.
Video	H.264/H.265/Smart H.264+/Smart H.265+/MJPEG	Database Application	Each database can be applied to video channels independently.
Audio	PCM/G711A/G711U/G26/AAC	Trigger Events	Buzzer, Voice Prompts, Email, Snapshot, Recording, Alarm Out, PTZ Activation, etc.
Network			
Network Protocol	HTTP, HTTPS, TCP/IP, IPv4, IPv6, RTSP, UDP, NTP, DHCP, DNS		
Mobile Phone Access	Android, iOS		
Interoperability	ONVIF (profile T/profile S/profile G), CGI, SDK		
Browser	Chrome, IE9 or above, Firefox		
Record Playback			


KX-CAi4K8108N2

8 Channel Compact 1U NVR

Design and specifications are subject to change without notice.
Pictures in the document are for reference only, and the actual product shall prevail.

Alarm Linkage	Video recording, snapshot, log, preset, tour
Perimeter Protection	
Performance	2 channels
Object classification	Human/Vehicle secondary recognition for tripwire and intrusion
AI Search	Search by target classification (Human, Vehicle)
Alarm	
General Alarm	Motion detection, privacy masking, video loss, PIR alarm, IPC alarm
Anomaly Alarm	Front-end device going offline, storage error, full storage, IP conflict, MAC conflict, login lock, network security anomaly
Alarm Linkage	Video recording, snapshot, log, preset, tour
External Port	
HDD	1 SATA port, up to 8 TB. The maximum HDD capacity varies with environment temperature
USB	1 front USB 2.0 port, 1 rear USB 2.0 port
HDMI	1
VGA	1
Network	1 RJ-45 port (10/100 Mbps)
RCA Input	1
RCA Output	1
General Parameter	
Power Supply	DC12V, 1.5A
Power Consumption	Total output of NVR is \leq 10W (without HDD)
Net Weight	0.81 kg (1.79 lb)
Gross weight	1.38 kg (3.04 lb)
Product Dimensions	260 mm \times 232.7 mm \times 47.6 mm (W \times L \times H) 10.24 inch \times 9.16 inch \times 1.87 inch (W \times L \times H)
Package Dimensions	89 mm \times 333 mm \times 315 mm (W \times L \times H) 3.50 inch \times 13.11 inch \times 12.40 inch (W \times L \times H)
Operating Temperature	-10°C to 55°C (+14°F to +113°F)
Storage Temperature	0°C to 40°C (+32°F to +104°F)
Operating Humidity	10%–93%
Storage Humidity	30%–85%
Operating Altitude	3000 m (9843 ft)
Installation	Desktop mounting

Dimensions (mm[inch])

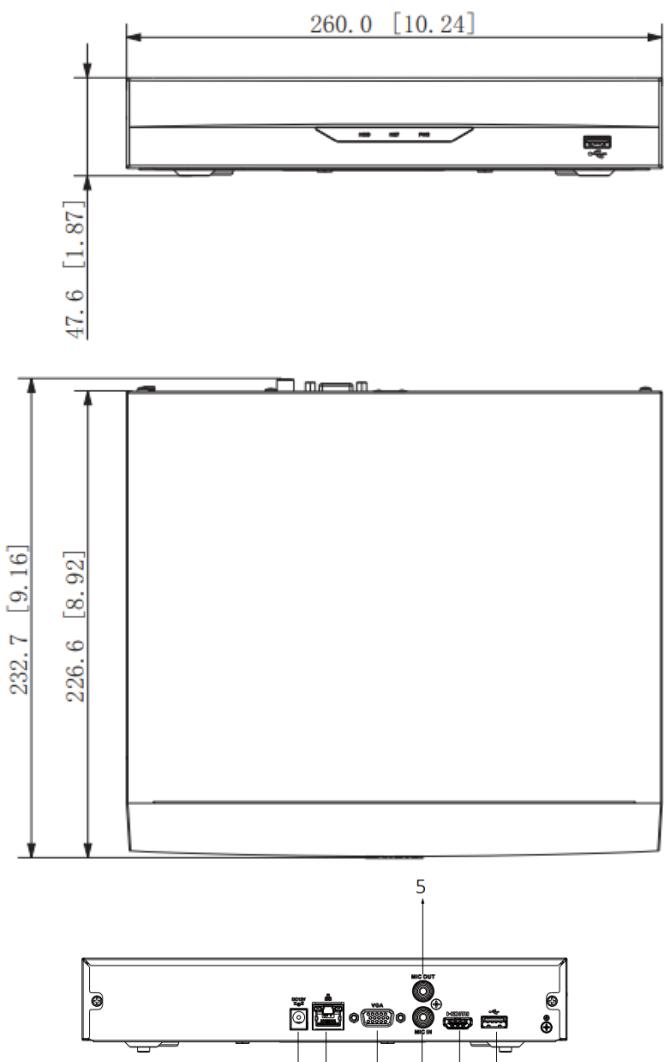

1	DC 12V Power Input	2	Network Port
3	VGA Port	4	AUDIO IN, RCA Connector
5	AUDIO OUT, RCA Connector	6	HDMI Port
7	USB Port		